


Fig.IN 177G

PN10 rechte GGG-40 terugslagklep, scharnierende klep, hefboom en gewicht,
RVS 304 zitting, rubber klepring, flenzen en boring PN10, Fig.IN 177G.

PN10 swing type check valve, nodular cast iron GGG-40.3 body and bolted
cover, stainless steel AISI 304 seat, disc with NBR insert, weight loaded,
flanged PN10, Fig.IN 177G.

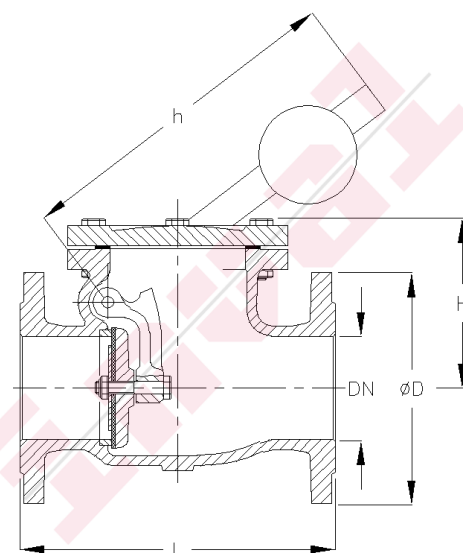

OPMERKINGEN / REMARKS

MATERIAAL / MATERIAL

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Deksel / Bonnet	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Zitting / Seat	Roestvast staal / Stainless steel	AISI 304	X5CrNi18-9	1.4301
Klep / Disc	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
As / Shaft	Roestvast staal / Stainless steel	AISI 420	X20Cr13	1.4021
Voering / Liner	NBR / NBR			

AFMETINGEN / DIMENSIONS

DN	40	50	65	80	100	125	150	200	250	300	350	400	500	600						
L	180	200	240	260	300	350	400	500	600	700	800	900	1100	1300						
ØD	150	165	185	200	220	250	285	340	395	445	505	565	670	780						
H	100	105	120	145	155	165	190	290	300	365	420	485	580	700						
h	200	200	300	300	300	400	400	500	500	600	670	900	1100	1100						
PCD	110	125	145	160	180	210	240	295	350	400	460	515	620	725						
nxd	4x18	4x18	4x18	8x18	8x18	8x18	8x22	8x22	12x22	12x22	16x22	16x26	20x26	20x30						
Kilo	13	16	19	28	34	52	64	101	175	235	385	545	1030	1247						