



appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 232-880S

Waterdichte gietijzeren wormkast, AISI 303 as met O-ring afdichting, IP68, coating 200 um, ISO5211 boring F12/F14/F16, max. koppel 2000 Nm, vierkant ... mm, Fig.IN 232-880S.

Watertight cast iron gearbox, AISI 303 shaft with O-ring sealing, IP68, coated 200 um, ISO5211 F12/F14/F16, max. torque 2000 Nm, square ... mm, Fig.IN 232-880S.

OPMERKINGEN / REMARKS

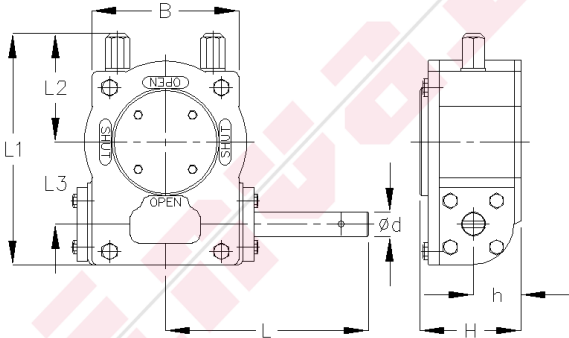

MATERIAAL / MATERIAL

Huis / Body	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
Deksel / Bonnet	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
As / Shaft	Roestvast staal / Stainless steel	AISI 316	X5CrNiMo17-12-2	1.4401

AFMETINGEN / DIMENSIONS

L	195																		
L1	235																		
L2	110																		
L3	85																		
Ød	20																		
H	95																		
h	45																		
B	200																		
Kilo	14																		