




appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry

Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 335

PN10 haakse snelsluitende klepafsluiter, GGG-40.3 huis en deksel, bronzen Rg5 binnenwerk, mechanisch bediend, flenzen volgens DIN PN10, Fig.IN 335.

PN10 angle quick-closing globe valve, nodular cast iron GGG-40.3 body and bolted bonnet, bronze Rg5 seats, wire operated, flanged PN10, Fig.IN 335.

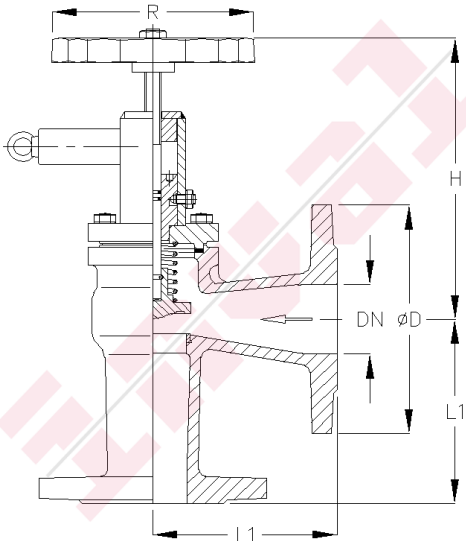

OPMERKINGEN / REMARKS

MATERIAAL / MATERIAL

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Deksel / Bonnet	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Spindel / Spindle	Messing / Brass	SoMs59	CuZn35NiMn2AlPb	CW710R / 2.0540
Zitting / Seat	Brons / Bronze	Rg 5	CuSn5Zn5Pb5-C	CC491K / 2.1096.01
Klep / Disc	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Kap / Cover	Staal / Steel	St. 37-2	EN S235JR	1.0037
Handwiel / Handwheel	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
Veer / Spring	Verenstaal / Spring Steel		DIN EN 10270 SH	
Dichtingen / Seals	FKM / FKM			
Bus / Bush	Roestvast staal / Stainless steel	AISI 303		
Loopmoer / Travelling	Staal / Steel	St. 37-2	EN S235JR	1.0037

AFMETINGEN / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150								
L1	90	95	100	105	115	125	145	155	175	200	225								
ØD	95	105	115	140	150	165	185	200	220	250	285								
H	185	185	195	205	230	240	275	290	350	410	430								
ØR	120	120	140	140	160	160	180	200	225	250	300								
PCD	65	75	85	100	110	125	145	160	180	210	240								
nxd	4x14	4x14	4x14	4x18	4x18	4x18	4x18	8x18	8x18	8x18	8x22								
Kilo	3,8	4,3	5,4	7,4	10,9	12,6	14,7	21,3	31,9	48,3	62,8								