



appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 4021FS

PN16 2-delige stalen GS-C25 kogelkraan, volle doorlaat, CF8M kogel,
PTFE dichtingen, fire-safe, flenzen volgens DIN PN16, Fig.IN 4021FS.

PN16 2-piece steel GS-C25 ball valve, full bore, CF8M ball,
PTFE seats, fire-safe, flanges according to DIN PN16, Fig.IN 4021FS.

OPMERKINGEN / REMARKS

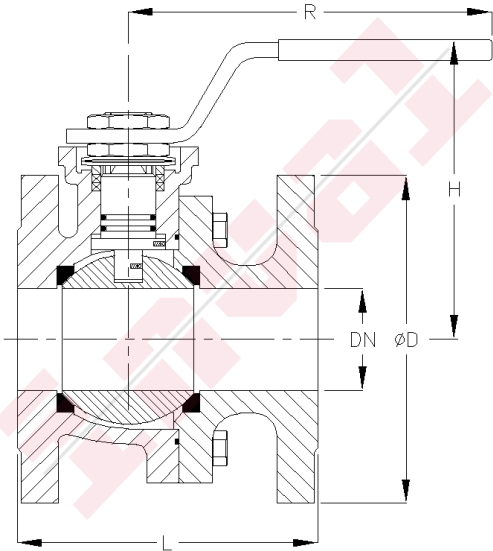

MATERIAAL / MATERIAL

Huis / Body	Staal / Steel	GS-C25	GP240GH	1.0619
Zitting / Seat	PTFE / PTFE			
Handgreep / Lever	Roestvast staal / Stainless steel	AlSi 304	X5CrNi18-9	1.4301
As / Shaft	Roestvast staal / Stainless steel	AlSi 316	X5CrNiMo17-12-2	1.4401
Kogel / Ball	Roestvast staal / Stainless steel	AlSi 304	X5CrNi18-9	1.4301
Dichtingen / Seals	PTFE / PTFE			

AFMETINGEN / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100	125	150								
L	115	120	125	130	140	150	170	180	190	325	350								
ØD	95	105	115	140	150	165	185	200	220	250	285								
H	85	85	90	110	110	120	160	170	185	210	230								
R	160	160	160	205	205	205	325	325	325	520	620								
PCD	65	75	85	100	110	125	145	160	180	210	240								
nxd	4x14	4x14	4x14	4x18	4x18	4x18	4x18	8x18	8x18	8x18	8x22								
Kilo	2,4	3,2	4,1	5,8	8,1	10,6	13,3	19,1	25,6	47,6	63,5								