



appendages en instrumenten voor  
scheepsbouw en industrie  
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.  
Buitendijks 5 3356 LX Papendrecht  
Telefoon +31 (0)78 - 641 15 00  
E-mail info@invalholland.com  
Website www.invalholland.com

Fig.IN 4022FS

PN16 2-delige rvs CF8M kogelkraan, volle doorlaat, CF8M kogel,  
PTFE dichtingen, fire-safe, flenzen volgens DIN PN16, Fig.IN 4022FS.

PN16 2-piece stainless steel CF8M ball valve, full bore, CF8M ball,  
PTFE seats, fire-safe, flanges according to DIN PN16, Fig.IN 4022FS.

OPMERKINGEN / REMARKS

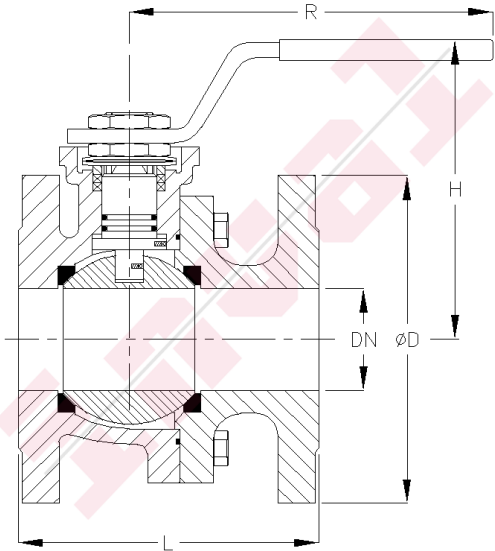

MATERIAAL / MATERIAL

|                    |                                   |          |                 |        |
|--------------------|-----------------------------------|----------|-----------------|--------|
| Huis / Body        | Roestvast staal / Stainless steel | CF8M     | X6CrNiMo18-10   | 1.4408 |
| Zitting / Seat     | PTFE / PTFE                       |          |                 |        |
| Handgreep / Lever  | Roestvast staal / Stainless steel | AlSi 304 | X5CrNi18-9      | 1.4301 |
| As / Shaft         | Roestvast staal / Stainless steel | AlSi 316 | X5CrNiMo17-12-2 | 1.4401 |
| Kogel / Ball       | Roestvast staal / Stainless steel | AlSi 316 | X5CrNiMo17-12-2 | 1.4401 |
| Dichtingen / Seals | PTFE / PTFE                       |          |                 |        |

AFMETINGEN / DIMENSIONS

|      |      |      |      |      |      |      |      |      |      |      |      |  |  |  |  |  |  |  |  |
|------|------|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|--|--|
| DN   | 15   | 20   | 25   | 32   | 40   | 50   | 65   | 80   | 100  | 125  | 150  |  |  |  |  |  |  |  |  |
| L    | 115  | 120  | 125  | 130  | 140  | 150  | 170  | 180  | 190  | 325  | 350  |  |  |  |  |  |  |  |  |
| ØD   | 95   | 105  | 115  | 140  | 150  | 165  | 185  | 200  | 220  | 250  | 285  |  |  |  |  |  |  |  |  |
| H    | 85   | 85   | 90   | 110  | 110  | 120  | 160  | 170  | 185  | 210  | 230  |  |  |  |  |  |  |  |  |
| R    | 160  | 160  | 160  | 205  | 205  | 205  | 325  | 325  | 325  | 520  | 620  |  |  |  |  |  |  |  |  |
| PCD  | 65   | 75   | 85   | 100  | 110  | 125  | 145  | 160  | 180  | 210  | 240  |  |  |  |  |  |  |  |  |
| nxd  | 4x14 | 4x14 | 4x14 | 4x18 | 4x18 | 4x18 | 4x18 | 8x18 | 8x18 | 8x18 | 8x22 |  |  |  |  |  |  |  |  |
| Kilo | 2,4  | 3,2  | 4,1  | 5,8  | 8,1  | 10,6 | 13,3 | 19,1 | 25,6 | 47,6 | 63,5 |  |  |  |  |  |  |  |  |