



appendages en instrumenten voor  
scheepsbouw en industrie  
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.  
Buitendijks 5 3356 LX Papendrecht  
Telefoon +31 (0)78 - 641 15 00  
E-mail info@invalholland.com  
Website www.invalholland.com

Fig.IN 4054

PN16 stalen 3-weg kogelkraan, AISI 304 kogel, volle doorlaat, T-boring,  
PTFE dichtingen, flenzen en boring volgens DIN PN16, Fig.IN 4054

PN16 3-way steel A216 WCB ball valve, full bore, AISI 304 ball, PTFE seats,  
T-port, lever operated, flanged PN16, Fig.IN 4054.

OPMERKINGEN / REMARKS

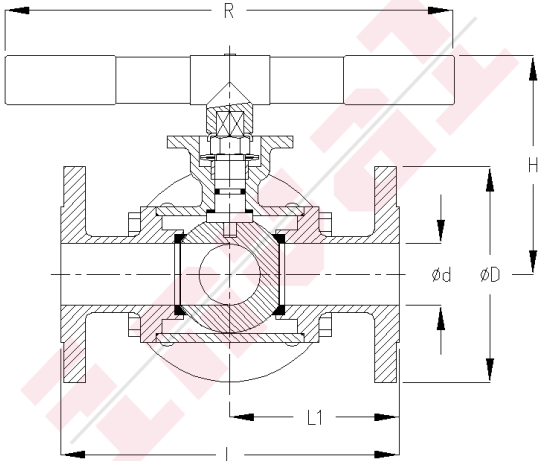

MATERIAAL / MATERIAL

|                    |                                   |          |            |        |
|--------------------|-----------------------------------|----------|------------|--------|
| Huis / Body        | Staal / Steel                     | GS-C25   | GP240GH    | 1.0619 |
| Zitting / Seat     | PTFE / PTFE                       |          |            |        |
| Handgreep / Lever  | Roestvast staal / Stainless steel | AISI 304 | X5CrNi18-9 | 1.4301 |
| As / Shaft         | Roestvast staal / Stainless steel | AISI 304 | X5CrNi18-9 | 1.4301 |
| Kogel / Ball       | Roestvast staal / Stainless steel | AISI 304 | X5CrNi18-9 | 1.4301 |
| Dichtingen / Seals | PTFE / PTFE                       |          |            |        |

AFMETINGEN / DIMENSIONS

|      |      |      |      |      |      |      |      |      |      |  |  |  |  |  |  |  |  |  |  |
|------|------|------|------|------|------|------|------|------|------|--|--|--|--|--|--|--|--|--|--|
| DN   | 25   | 32   | 40   | 50   | 65   | 80   | 100  | 125  | 150  |  |  |  |  |  |  |  |  |  |  |
| L    | 186  | 196  | 232  | 252  | 270  | 292  | 360  | 416  | 470  |  |  |  |  |  |  |  |  |  |  |
| L1   | 93   | 98   | 116  | 126  | 135  | 146  | 180  | 208  | 235  |  |  |  |  |  |  |  |  |  |  |
| ØD   | 115  | 140  | 150  | 165  | 185  | 200  | 220  | 250  | 285  |  |  |  |  |  |  |  |  |  |  |
| Ød   | 25   | 32   | 38   | 50   | 65   | 76   | 100  | 125  | 150  |  |  |  |  |  |  |  |  |  |  |
| H    | 105  | 120  | 130  | 155  | 165  | 175  | 210  | 250  | 280  |  |  |  |  |  |  |  |  |  |  |
| R    | 400  | 400  | 400  | 400  | 400  | 400  | 600  | 600  | 800  |  |  |  |  |  |  |  |  |  |  |
| PCD  | 85   | 100  | 110  | 125  | 145  | 160  | 180  | 210  | 240  |  |  |  |  |  |  |  |  |  |  |
| nxd  | 4x14 | 4x18 | 4x18 | 4x18 | 4x18 | 8x18 | 8x18 | 8x18 | 8x22 |  |  |  |  |  |  |  |  |  |  |
| Kilo | 10   | 13   | 16   | 19   | 23   | 35   | 68   | 95   | 125  |  |  |  |  |  |  |  |  |  |  |