


Watertight deckstand, height 250 mm, stainless steel AISI 303 shaft, brass position indicator, bronze Rg7 bearings, NBR O-ring sealing, handwheel operated round ... mm, max. 25 revolutions, flanged PN10, Fig.IN 4102.

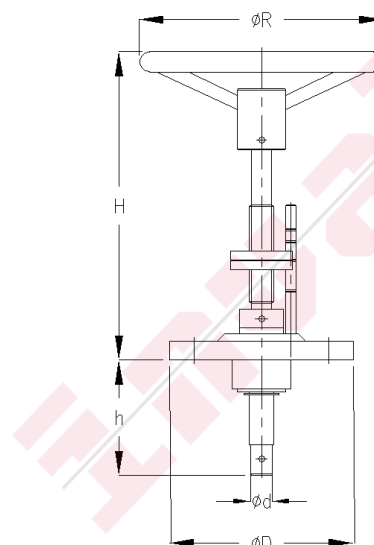

MATERIAAL / MATERIAL				
Huis / Body	Staal / Steel	St. 37-2	EN S235JR	1.0037
Spindel / Spindle	Roestvast staal / Stainless steel	AISI 303		
Handwiel / Handwheel	Staal / Steel	St. 37-2	EN S235JR	1.0037
Standaanw. / Indicator	Messing / Brass	Ms58	CuZn39Pb3	CW614N / 2.0401
Lagerbussen / Bearings	Messing / Brass	Ms58	CuZn39Pb3	CW614N / 2.0401

[illegible]