




appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry

Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 4150

PN16 wafer type stalen C22.8 / GS-C25 kogelkraan, volle doorlaat,
AISI 304 kogel, PTFE dichtingen, fire safe, getapte flenzen volgens
DIN PN10, Fig.IN 4150.

PN16 steel C22.8 / GS-C25 wafer type ball valve, full bore, AISI 304 ball,
PTFE seats, fire-safe, flanges tapped to DIN PN16, Fig.IN 4150.

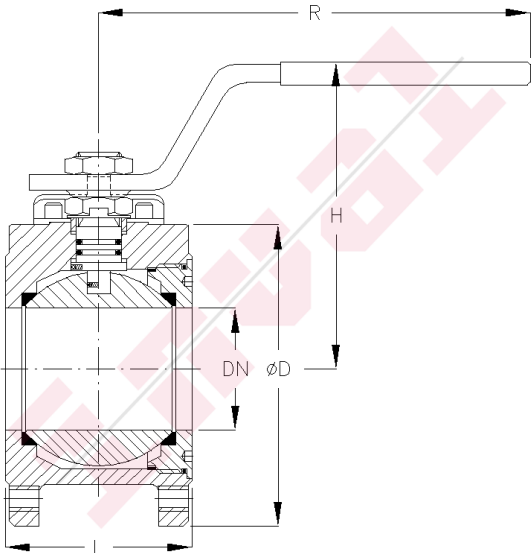

OPMERKINGEN / REMARKS

MATERIAAL / MATERIAL

Huis / Body	Staal / Steel	C22.8 / GS-C25	GP240GH	1.0460 / 1.0619
Zitting / Seat	PTFE / PTFE			
Handgreep / Lever	Staal / Steel			
As / Shaft	Roestvast staal / Stainless steel	AISI 304	X5CrNi18-9	1.4301
Kogel / Ball	Roestvast staal / Stainless steel	AISI 304	X5CrNi18-9	1.4301
Dichtingen / Seals	PTFE / PTFE			

AFMETINGEN / DIMENSIONS

DN	15	20	25	32	40	50	65	80	100										
L	35	38	43	54	60	70	95	122	140										
ØD	95	105	115	140	150	165	185	200	220										
H	65	70	80	85	100	110	140	150	165										
R	140	140	180	180	230	230	350	350	510										
PCD	65	75	85	100	110	125	145	160	180										
nxd	4xM12	4xM12	4xM12	4xM16	4xM16	4xM16	4xM16	8xM16	8xM16										
Kilo	1,3	1,8	2,5	4	5,5	7,3	15	19,5	31,5										