


Fig.IN 601

PN4 rechte GG-25 groffilter, AISI 316 zeefkorf, perforatie vierkant 5 mm, inwendig en uitwendig epoxy verf, flenzen volgens DIN PN10, Fig.IN 601.

PN4 straight mudbox, cast iron GG-25 body and bolted cover, AISI 316 element, perforation square 5 mm, flanged PN10, Fig.IN 601.

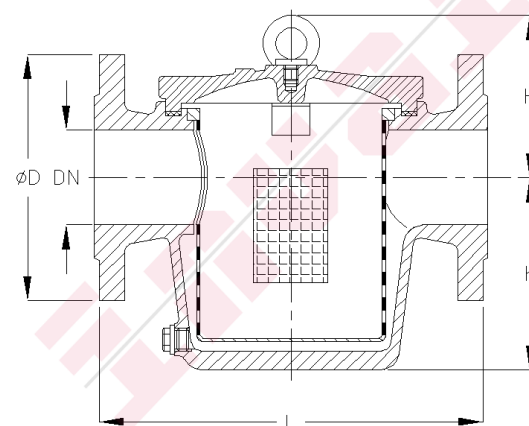

OPMERKINGEN / REMARKS

Doorlaat Bore	Drukklasse Pressure rating	Max. werkdruk Max. working pressure
DN 25-450	PN 4	4 bar
DN 500-700	PN 2,5	2,5 bar

MATERIAAL / MATERIAL

	Huis / Body	Deksel / Bonnet	Korf / Basket
	Gietijzer / Cast iron	Gietijzer / Cast iron	Roestvast staal / Stainless steel
	GG-25	GG-25	AISI 316
	GLJ-250	GLJ-250	X5CrNiMo17-12-2
	JL-1040 / 0.6025	JL-1040 / 0.6025	1.4401

AFMETINGEN / DIMENSIONS

DN	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600		
L	160	200	200	230	290	310	350	400	480	600	600	600	700	800	740	1000	1100	1100		
ØD	115	140	150	165	185	200	220	250	285	315	340	395	445	505	565	615	670	780		
H	90	110	100	100	115	120	145	160	175	210	210	240	270	360	425	475	525	635		
h	90	100	95	110	135	155	185	235	270	350	350	350	390	390	475	525	575	575		
PCD	85	100	110	125	145	160	180	210	240	270	295	350	400	460	515	565	620	725		
nxd	4x14	4x14	4x18	4x18	4x18	8x18	8x18	8x18	8x22	8x22	8x22	12x22	12x22	16x22	16x26	20x26	20x26	20x30		
Kilo	5	8	9	12	16	20	28	39	62	141	155	175	235	300	430	480	555	830		