




appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry

Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 603N

PN4 haakse GGG-40.3 groffilter, AISI 316 zeefkorf, perforatie vierkant 5 mm, in- en uitwendig epoxy verf, flenzen volgens DIN PN10, Fig.IN 603N.

PN4 angle mudbox, nodular cast iron GGG-40.3 body and bolted cover, AISI 316 element, perforation square 5 mm, flanged PN10, Fig.IN 603N.

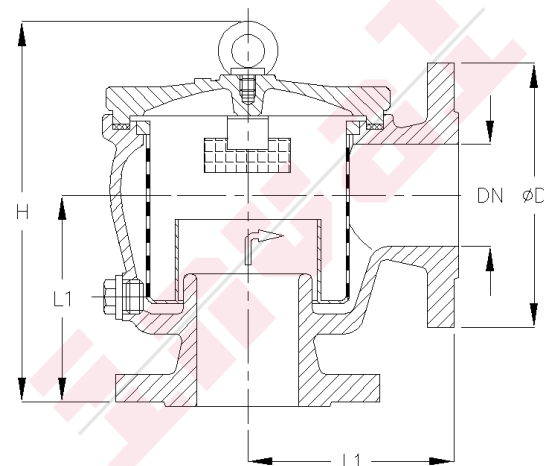

OPMERKINGEN / REMARKS

Doorlaat Bore	Drukklasse Pressure rating	Max. werkdruk Max. working pressure
DN 25-450	PN 4	16 bar
DN 500-700	PN 2,5	2,5 bar

MATERIAAL / MATERIAL

Part	Material	Material	Material	Material
Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Deksel / Bonnet	Nodulair gietijzer / Nodular cast iron	GGG-40.3	GJS-400-18 LT	JS-1025 / 0.7043
Korf / Basket	Roestvast staal / Stainless steel	AISI 316	X5CrNiMo17-12-2	1.4401

AFMETINGEN / DIMENSIONS

DN	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600		
L1	100	105	125	135	150	175	195	220	270	300	300	390	450	400	520	625	675	720		
ØD	115	140	150	165	185	200	220	250	285	315	340	395	445	505	565	615	670	780		
H	195	235	235	255	270	320	345	410	470	535	535	650	800	735	940	1050	1130	1225		
PCD	85	100	110	125	145	160	180	210	240	270	295	350	400	460	515	565	620	725		
nxd	4x14	4x14	4x18	4x18	4x18	8x18	8x18	8x18	8x22	8x22	8x22	12x22	12x22	16x22	16x26	20x26	20x26	20x30		
Kilo	5	7	12	15	20	30	38	62	87	120	125	165	245	250	380	530	590	850		