


PN10 wafer type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, hydraulic actuator, double execution, double acting, max. supply pressure 125 bar, mounting between flanges PN10, Fig.IN 814NBHD600.

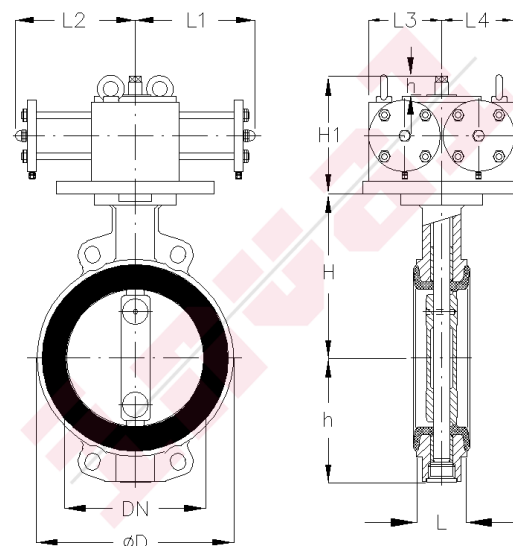

MATERIAAL / MATERIAL				
Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlSl 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
Deksel / Bonnet	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
As act. / Shaft act.	Roestvast staal / Stainless steel	AlSl 304	X5CrNi18-9	1.4301
Bouten / Bolts	Roestvast staal / Stainless steel	AlSl 304	X5CrNi18-9	1.4301
Cilinder / Cilinder	Staal / Steel			

[illegible]