



appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 815NBEL250300AQ

PN10 GGG-40 vlinderklep, monoflens type, NBR ge vulcaniseerde voering, bronzen klep, elektrische bediening, ... V, looptijd 35 seconden, IP68, inclusief anti-condens verwarming, extra eindschakelaars, standaanwijzer en noodhand bediening, montage tussen flenzen volgens DIN PN10, Fig.IN 815NBEL250300AQ.

PN10 monoflange type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, electric actuator, ... V, operating time 35 seconds, IP68, complete with heater resistance, extra limit switches, position indicator and emergency handwheel, mounting between flanges PN10, Fig.IN 815NBEL250300AQ.

OPMERKINGEN / REMARKS

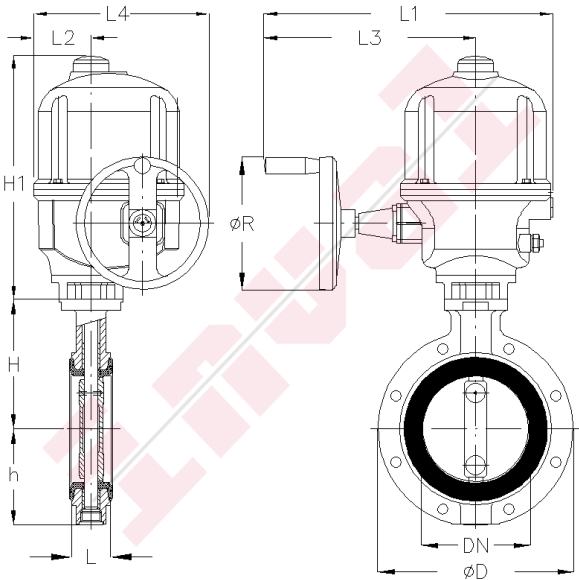

MATERIAAL / MATERIAL

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlS1 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Aluminium / Aluminium			
Deksel / Bonnet	Aluminium / Aluminium			
As act. / Shaft act.	Staal / Steel			
Bouten / Bolts	Roestvast staal / Stainless steel	AlS1 304	X5CrNi18-9	1.4301

AFMETINGEN / DIMENSIONS

DN	250	300																	
L	68	78																	
L1	430	430																	
L2	90	90																	
L3	310	310																	
L4	260	260																	
ØD	395	445																	
H	245	270																	
H1	330	330																	
h	195	220																	
ØR	160	200																	
PCD	350	400																	
nxd	12x22	12x22																	
Kilo	41	59																	