



appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 819ERH

PN10 GGG-40 vlinderklep, flens type, EPDM ge vulcaniseerde voering, AISI 316
klep, handgreep bediening, flenzen volgens DIN PN10, Fig.IN 819ERH.

PN10 double flanged type butterfly valve, GGG-40 body, AISI 316 disc,
vulcanized EPDM liner, lever operated, flanged PN10, Fig.IN 819ERH.

OPMERKINGEN / REMARKS

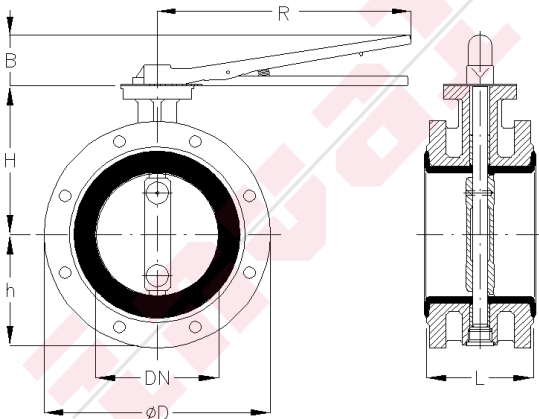

MATERIAAL / MATERIAL

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Roestvast staal / Stainless steel	AISI 316	X5CrNiMo17-12-2	1.4401
As / Shaft	Roestvast staal / Stainless steel	AISI 431	X20CrNi17-2	1.4057
Voering / Liner	EPDM / EPDM			
Handgreep / Lever	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040

AFMETINGEN / DIMENSIONS

DN	50	65	80	100	125	150	200												
L	108	112	114	127	140	140	152												
ØD	165	185	200	220	250	285	340												
H	120	125	135	150	160	180	205												
h	70	75	80	100	110	135	160												
B	55	55	55	55	70	70	70												
R	230	230	230	230	330	330	330												
PCD	125	145	160	180	210	240	295												
nxd	4x18	4x18	8x18	8x18	8x18	8x22	8x22												
Kilo	9,2	10,7	12,7	15,7	21,3	24,3	36,3												