


PN10 GGG-40 vlinderklep, flens type, NBR gevulcaniseerde voering, bronzen klep, elektrische bediening, ... V, looptijd 35 seconden, IP68, inclusief anti-condens verwarming, extra eindschakelaars, standaardwijzer en noodhand bediening, flenzen volgens DIN PN10, Fig.IN 819NBEL250300A0.

PN10 double flanged type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, electric actuator, ... V, operating time 35 seconds, IP68, complete with heater resistance, extra limit switches, position indicator and emergency handwheel, flanged PN10, Fig.IN 819NBEL250300AQ.

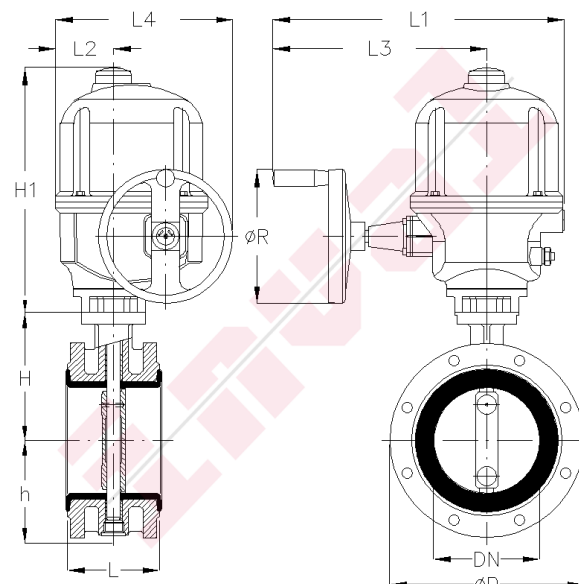

OPMERKINGEN / REMARKS

MATERIAAL / MATERIAL

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlSl 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Aluminium / Aluminium			
Deksel / Bonnet	Aluminium / Aluminium			
As act. / Shaft act.	Staal / Steel			
Bouten / Bolts	Roestvast staal / Stainless steel	AlSl 304	X5CrNi18-9	1.4301

AFMETINGEN / DIMENSIONS

DN	250	300
L	165	178
L1	430	430
L2	90	90
L3	310	310
L4	260	260
ØD	395	445
H	245	270
H1	330	330
h	195	220
ØR	160	200
PCD	350	400
nxd	12x22	12x22
Kilo	64	84