




appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry

Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 819NBEL250300SQ

PN10 GGG-40 vlinderklep, flens type, NBR gevulcaniseerde voering, bronzen klep, elektrische bediening, ... V, looptijd ... seconden, IP67, inclusief anti-condens verwarming, extra eindschakelaars, standaanwijzer en noodhand bediening, flenzen volgens DIN PN10, Fig.IN 819NBEL250300SQ.

PN10 double flanged type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, electric actuator, ... V, operating time ... seconds, IP67, complete with heater resistance, extra limit switches, position indicator and emergency handwheel, flanged PN10, Fig.IN 819NBEL250300SQ.

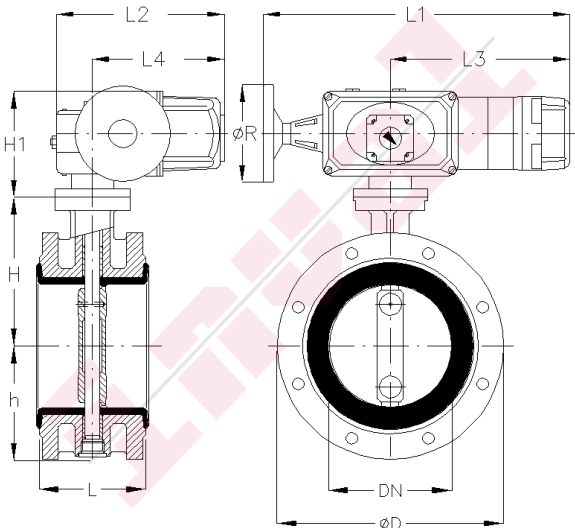

OPMERKINGEN / REMARKS

MATERIAAL / MATERIAL				
Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlS1 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Aluminium / Aluminium			
Deksel / Bonnet	Aluminium / Aluminium			
As act. / Shaft act.	Staal / Steel			
Bouten / Bolts	Roestvast staal / Stainless steel	AlS1 304	X5CrNi18-9	1.4301

AFMETINGEN / DIMENSIONS														
DN	250	300												
L	165	178												
L1	460	530												
L2	315	315												
L3	295	360												
L4	230	230												
ØD	395	445												
H	245	270												
H1	180	180												
h	195	220												
ØR	160	250												
PCD	350	400												
nxd	12x22	12x22												
Kilo	67	89												