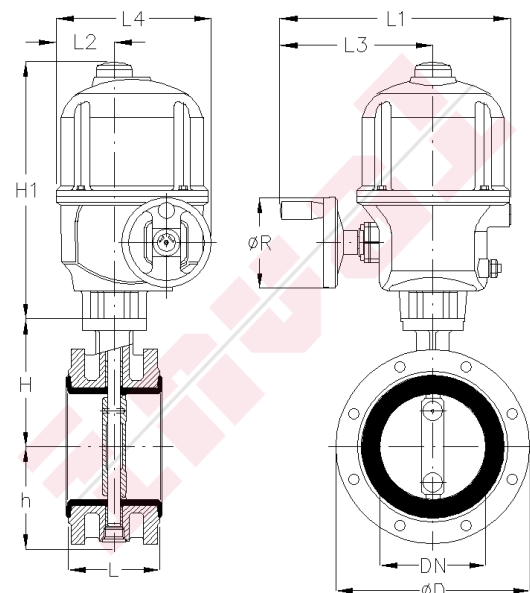


appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industryInval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com**Fig.IN 819NBEL50200AQ**

PN10 GGG-40 vlinderklep, flens type, NBR gevulcaniseerde voering, bronzen klep, elektrische bediening, ... V, looptijd ... seconden, IP68, inclusief anti-condens verwarming, extra eindschakelaars, standaanwijzer en noodhand bediening, flenzen volgens DIN PN10, Fig.IN 819NBEL50200AQ.

PN10 double flanged type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, electric actuator, ... V, operating time ... seconds, IP68, complete with heater resistance, extra limit switches, position indicator and emergency handwheel, flanged PN10, Fig.IN 819NBEL50200AQ.

**OPMERKINGEN / REMARKS****MATERIAAL / MATERIAL**

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlSl 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Aluminium / Aluminium			
Deksel / Bonnet	Aluminium / Aluminium			
As act. / Shaft act.	Staal / Steel			
Bouten / Bolts	Roestvast staal / Stainless steel	AlSl 304	X5CrNi18-9	1.4301

AFMETINGEN / DIMENSIONS

DN	50	65	80	100	125	150	200												
L	108	112	114	127	140	140	152												
L1	280	280	280	280	280	280	280												
L2	75	75	75	75	75	75	75												
L3	185	185	185	185	185	185	185												
L4	185	185	185	185	185	185	185												
ØD	165	185	200	220	250	285	340												
H	120	125	135	150	160	180	205												
H1	290	290	290	290	290	290	290												
h	70	75	80	100	110	135	160												
ØR	100	100	100	100	100	100	100												
PCD	125	145	160	180	210	240	295												
nxd	4x18	4x18	8x18	8x18	8x18	8x22	8x22												
Kilo	17,5	19	2	24	29	32	44												