



Fig.IN 819NBELK


appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry

Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

PN10 GGG-40 vlinderklep, flens type, NBR gevulcaniseerde voering, bronzes klep, elektrische bediening, compacte aluminium behuizing, ... V, looptijd ... seconden, IP67, inclusief anti-condens verwarming, extra eindschakelaars, standaanwijzer en noodhand bediening, flenzen volgens DIN PN10, Fig.IN 819NBELK.

PN10 double flanged type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, compact type aluminium electric actuator, ... V, operating time ... seconds, IP67, complete with heater resistance, extra limit switches, position indicator and emergency handwheel, flanged PN10, Fig.IN 819NBELK.

OPMERKINGEN / REMARKS

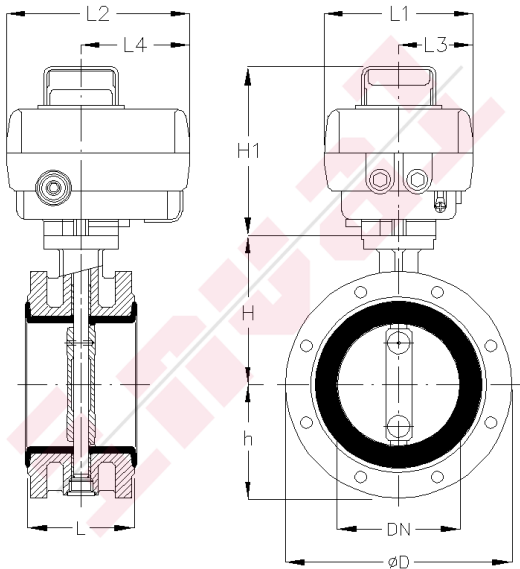

MATERIAAL / MATERIAL				
Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlS1 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Aluminium / Aluminium			
Deksel / Bonnet	Aluminium / Aluminium			
As act. / Shaft act.	Staal / Steel			
Bouten / Bolts	Roestvast staal / Stainless steel	AlS1 304	X5CrNi18-9	1.4301

AFMETINGEN / DIMENSIONS															
DN	50	65	80	100											
L	108	112	114	127											
L1	130	130	130	130											
L2	170	170	170	170											
L3	65	65	65	65											
L4	100	100	100	100											
ØD	165	185	200	220											
H	120	125	135	150											
H1	155	155	155	155											
h	70	75	80	100											
PCD	125	145	160	180											
nxd	4x18	4x18	8x18	8x18											
Kilo	10,7	12,2	14,2	17,2											