


PN10 double flanged type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, hydraulic actuator, double execution, double acting, max. supply pressure 125 bar, flanged PN10, Fig.IN 819NBHD600.

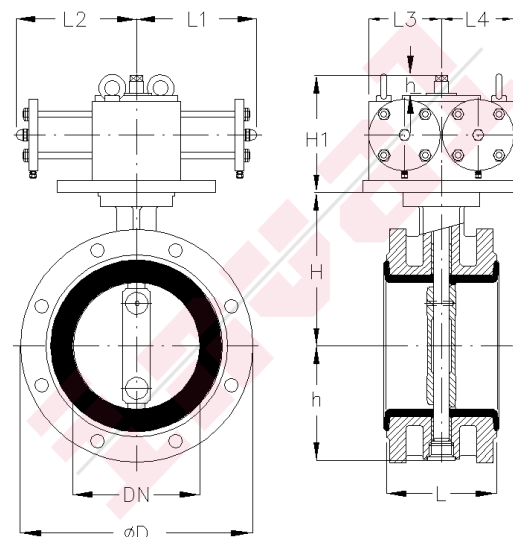

MATERIAAL / MATERIAL				
Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlSl 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Huis act. / Body act.	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
Deksel / Bonnet	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
As act. / Shaft act.	Roestvast staal / Stainless steel	AlSl 304	X5CrNi18-9	1.4301
Bouten / Bolts	Roestvast staal / Stainless steel	AlSl 304	X5CrNi18-9	1.4301
Cilinder / Cilinder	Staal / Steel			

DN	600
L	267
L1	300
L2	300
L3	150
L4	150
ØD	780
H	465
H1	260
h	450
h1	20
PCD	725
nxd	20x30
Kilo	361