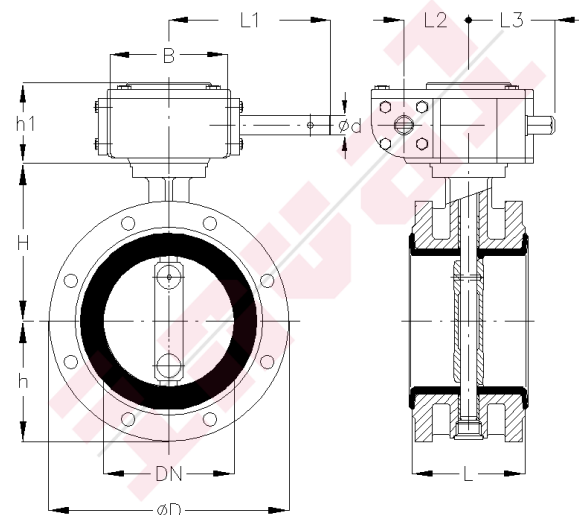


appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industryInval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com**Fig.IN 819NBWW**

PN10 GGG-40 vlinderklep, flens type, NBR gevulcaniseerde voering, bronzen klep, waterdichte wormkast, flenzen volgens DIN PN10, Fig.IN 819NBWW.

PN10 double flanged type butterfly valve, GGG-40 body, bronze disc, vulcanized NBR liner, watertight cast iron gearbox, flanged PN10, Fig.IN 819NBWW.

**OPMERKINGEN / REMARKS****MATERIAAL / MATERIAL**

Huis / Body	Nodulair gietijzer / Nodular cast iron	GGG-40	GJS-400-15	JS-1030 / 0.7040
Klep / Disc	Aluminium brons / Aluminium bronze	AB2	CuAl10Fe5Ni5	CC333G / 2.0975.01
As / Shaft	Roestvast staal / Stainless steel	AlSl 431	X20CrNi17-2	1.4057
Voering / Liner	NBR / NBR			
Wormkast / Gearbox	Gietijzer / Cast iron	GG-25	GLJ-250	JL-1040 / 0.6025
As act. / Shaft act.	Roestvast staal / Stainless steel	AlSl 316	X5CrNiMo17-12-2	1.4401

AFMETINGEN / DIMENSIONS

DN	50	65	80	100	125	150	200	250	300	350	400	450	500	600						
L	108	112	114	127	140	140	152	165	178	190	216	222	229	267						
L1	160	160	160	160	160	160	160	200	200	200	200	200	230	275						
L2	55	55	55	55	55	55	55	70	70	70	85	85	105	130						
L3	65	65	65	65	65	65	65	95	95	95	110	110	110	145						
ØD	165	185	200	220	250	285	340	395	445	505	565	615	670	780						
ød	15	15	15	15	15	15	15	20	20	20	20	20	20	25						
H	120	125	135	150	160	180	205	245	270	315	350	375	415	465						
h	70	75	80	100	110	135	160	195	220	280	310	350	390	450						
h1	70	70	70	70	70	70	70	90	90	90	95	95	100	125						
B	105	105	105	105	105	105	105	140	140	140	200	200	220	285						
PCD	125	145	160	180	210	240	295	350	400	460	515	565	620	725						
nxd	4x18	4x18	8x18	8x18	8x18	8x22	8x22	12x22	12x22	16x22	16x26	20x26	20x26	20x30						
Kilo	11,5	13,5	15,5	18,5	23,5	33	39	60	80	92	112	133	184	290						