



appendages en instrumenten voor
scheepsbouw en industrie
valves for shipbuilding and industry


Inval Industrial Valves Holland B.V.
Buitendijks 5 3356 LX Papendrecht
Telefoon +31 (0)78 - 641 15 00
E-mail info@invalholland.com
Website www.invalholland.com

Fig.IN 808P

Messing veiligheidstoestel, recht model, veerbelast, gasdichte kap,
PTFE dichting, afblaasdruk ... bar, BSP bi.draad aansluiting, Fig.IN 808P.

Brass safety valve, straight pattern, spring loaded, gastight cap,
PTFE seated, set pressure ... bar, BSP female threaded ends, Fig.IN 808P.

OPMERKINGEN / REMARKS

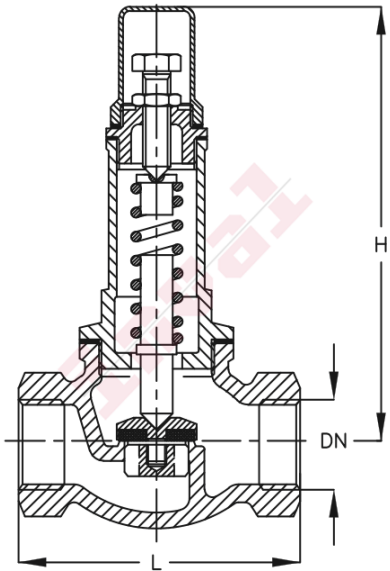

MATERIAAL / MATERIAL

Huis / Body	Brons / Bronze	Rg 5	CuSn5Zn5Pb5-C	CC491K / 2.1096.01
Deksel / Bonnet	Messing / Brass	Ms58	CuZn39Pb3	CW614N / 2.0401
Spindel / Spindle	Messing / Brass	Ms58	CuZn39Pb3	CW614N / 2.0401
Klep / Disc	Messing / Brass	Ms58	CuZn39Pb3	CW614N / 2.0401
Veer / Spring	Roestvast staal / Stainless steel	AlS1 304	X5CrNi18-9	1.4301
Kap / Cap	Messing / Brass	Ms58	CuZn39Pb3	CW614N / 2.0401
Zitting / Seat	PTFE / PTFE			

AFMETINGEN / DIMENSIONS

DN	3/8"	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"									
L	54	59	71	81	96	104	128	155	173	199									
H	110	115	145	165	200	215	240	295	310	390									
Kilo	0,4	0,4	0,7	1,1	1,6	2,2	3,4	6,4	8,6	13,9									