




appendages en instrumenten voor  
scheepsbouw en industrie  
valves for shipbuilding and industry  
Inval Industrial Valves Holland B.V.  
Buitendijks 5 3356 LX Papendrecht  
Telefoon +31 (0)78 - 641 15 00  
E-mail info@invalholland.com  
Website www.invalholland.com

Fig.IN 206

PN16 haakse bronzen Rg5 klepafsluiter, geschroefd kopstuk, vaste klep, ptfe dichting, BSP bi. draad aansluiting, Fig.IN 206.

PN16 angle globe valve, bronze Rg5 body, screwed bonnet, SL type disc with PTFE insert, BSP female threaded ends Fig.IN 206.

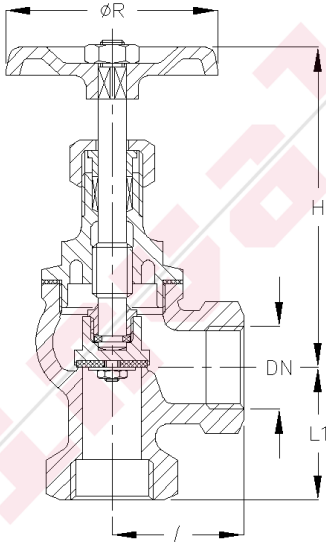

OPMERKINGEN / REMARKS

| MATERIAAL / MATERIAL |                       |      |               |                    |
|----------------------|-----------------------|------|---------------|--------------------|
| Huis / Body          | Brons / Bronze        | Rg 5 | CuSn5Zn5Pb5-C | CC491K / 2.1096.01 |
| Deksel / Bonnet      | Messing / Brass       | Ms58 | CuZn39Pb3     | CW614N / 2.0401    |
| Spindel / Spindle    | Messing / Brass       | Ms58 | CuZn39Pb3     | CW614N / 2.0401    |
| Zitting / Seat       | PTFE / PTFE           |      |               |                    |
| Klep / Disc          | Messing / Brass       | Ms58 | CuZn39Pb3     | CW614N / 2.0401    |
| Handwiel / Handwheel | Aluminium / Aluminium |      |               |                    |

| AFMETINGEN / DIMENSIONS |      |      |      |      |     |        |        |     |        |     |     |  |  |  |  |  |  |  |
|-------------------------|------|------|------|------|-----|--------|--------|-----|--------|-----|-----|--|--|--|--|--|--|--|
| DN                      | 1/4" | 3/8" | 1/2" | 3/4" | 1"  | 1-1/4" | 1-1/2" | 2"  | 2-1/2" | 3"  | 4"  |  |  |  |  |  |  |  |
| L                       | 30   | 30   | 30   | 36   | 47  | 57     | 62     | 72  | 80     | 92  | 110 |  |  |  |  |  |  |  |
| L1                      | 29   | 29   | 29   | 32   | 38  | 44     | 47     | 54  | 72     | 74  | 84  |  |  |  |  |  |  |  |
| H                       | 80   | 80   | 80   | 90   | 100 | 110    | 125    | 135 | 185    | 210 | 230 |  |  |  |  |  |  |  |
| ØR                      | 55   | 55   | 55   | 70   | 70  | 80     | 80     | 90  | 125    | 150 | 150 |  |  |  |  |  |  |  |
| Kilo                    | 0,3  | 0,3  | 0,4  | 0,5  | 0,9 | 1,2    | 1,5    | 2,5 | 4,7    | 6   | 9,8 |  |  |  |  |  |  |  |