


Fig.IN 601B

PN4 rechte Rg5 groffilter, AISI 316 zeefkorf, perforatie vierkant 5 mm, flenzen volgens DIN PN10, Fig.IN 601B.

PN4 straight mudbox, bronze Rg5 body and bolted cover, AISI 316 element, perforation square 5 mm, flanged PN10, Fig.IN 601B.

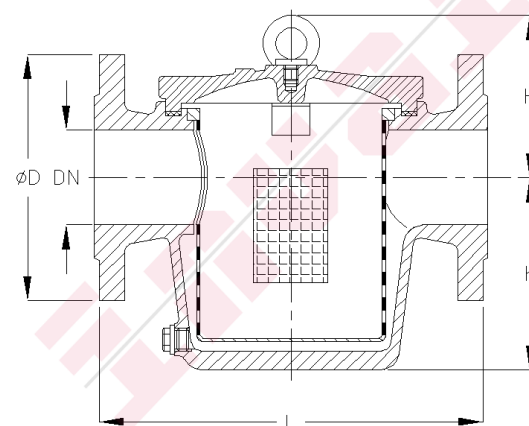

**OPMERKINGEN / REMARKS**

Doorlaat Bore	Drukklasse Pressure rating	Max. werkdruk Max. working pressure
DN 25-450	PN 4	4 bar
DN 500-700	PN 2,5	2,5 bar

**MATERIAAL / MATERIAL**

Part	Material	Grade	Material	Grade
Huis / Body	Brons / Bronze	Rg 5	CuSn5Zn5Pb5-C	CC491K / 2.1096.01
Deksel / Bonnet	Brons / Bronze	Rg 5	CuSn5Zn5Pb5-C	CC491K / 2.1096.01
Korf / Basket	Roestvast staal / Stainless steel	AISI 316	X5CrNiMo17-12-2	1.4401

**AFMETINGEN / DIMENSIONS**

DN	25	32	40	50	65	80	100	125	150	175	200	250	300	350	400	450	500	600		
L	160	200	200	230	290	310	350	400	480	600	600	700	800	740	1000	1100	1100			
ØD	115	140	150	165	185	200	220	250	285	315	340	395	445	505	565	615	670	780		
H	90	110	100	100	115	120	145	160	175	210	210	240	270	360	425	475	525	635		
h	90	100	100	105	135	155	185	225	265	350	350	345	390	390	475	525	575	575		
PCD	85	100	110	125	145	160	180	210	240	270	295	350	400	460	515	565	620	725		
nxd	4x14	4x14	4x18	4x18	4x18	8x18	8x18	8x18	8x22	8x22	8x22	12x22	12x22	16x22	16x26	20x26	20x26	20x30		
Kilo	5	8	12	16	23	28	42	60	75	141	155	175	235	300	430	480	555	940		